



TESTBOX[®] 1001

MULTI CHANNEL QUASI-STATIC DAQ

Trusted Technology in Quasi-Static Data Logging

TESTBOX1001 is a datalogger designed for Quasi-Static tests. The device is quite easy-to-use and optimized for strain gauges, LVDTs, potentiometers, load cells, thermocouples and all voltage-output sensors.

This datalogger includes 16-Bit ADCs (Analogue Digital Convertors), as well as, specially designed linear power supply, sensor excitation, analogue signal conditioner, filtering circuits are integrated. This all-inclusive architecture saves the user from the additional module selection and keeps the analogue signal quality at the maximum level.

TESTBOX1001 became the first choice of the researches especially in Civil Engineering, Mining, Geology, Metallurgy, Materials, Soil and Mechanical engineering tests where the change in the data is relatively in static nature. It can be connected to the computer over a single USB port from 8 to 64 channels. More than 10.000 tests have been conducted successfully with this device which is being used actively in hundreds of laboratories and testing institutes all over the world. Thousands of academical papers submitted based on these tests.

"Save Your Research Budget!"

In addition to easy-to-use all included design and flawless data logging, another important aspect of TESTBOX1001 is the price/performance ratio. While logging the precise data in the most reliable way, it also provides the researcher to plan the research budget in an effective manner.

"DEVELOPED 100% IN TDG LABORATORIES"

FEATURES

- 16-Bit Resolution
- 8-64 Channels
- Wide Sensor Compatibility:
 - Strain-Gauges & Strain-Gauge Based Sensors
 - Load Cells
 - Displacement Transducers (LVDT / Potentiometer)
 - Piezometers, Pressure Cells, Civil Eng. Sensors
 - Environmental Sensors
 - Voltage-Output Sensors
- Integrated "State of Art" Analogue Design - Sensor
- Excitation/Signal Conditioning/Filtering
- Multiple Gain Selection Possibilities for Millivolt Level
- Ideal for Laboratories
- User-Friendly Hardware & Software
- Data Security
- Price/Performance Advantage
- 100s of Labs, 10000s of Tests, 1000s of papers

FIELDS OF APPLICATION

- QUASI-STATIC DATA ACQUISITION
- STRAIN-GAUGE OPTIMIZED
- LABORATORIES & TESTING FACILITIES
- CIVIL ENGINEERING LABORATORIES
(Structural Mechanics, Materials, Soil, Hydro-Mechanics)
- MATERIALS TESTING
- METALLURGY, MINING, GEOLOGY ENG.
- MECHANICAL ENG.

Technical Specifications

CHANNELS

Number of Channels	8 per Device (Chassis)
Extention	Up to 64 Channels (per Gateway)
Input Range	± 10 V
Input Type	Differential
Gain Selection	Independent Adjustable Gain for Each Channel 8 levels from x1 to x890

DIGITIZATION

ADC	16 Bit, Delta-Sigma Oversampling,
Sampling Rate	8 Örnek / Saniye (Kanal Başına)
Sampling Type	Multiplexing
Dynamic Rate	< 72 dB
Filtering	Analog Anti-Aliasing Low Pass Filter

COMMUNICATION

Devices and Gateway	RS485
Connection to Computer	USB via Gateway

SENSOR COMPATIBILITY

Compatible Sensor Types	Position Transducers (Potentiometric, DC Type, Strain Based) Load Cell LVDT (DC Type) Voltage Output Sensors Full Bridge Strain Based Sensors Strain Gauge (via <u>Q-Cable</u>) Thermocouple (via <u>TC Connection Box</u>) RTD (via <u>RTD Cable</u>)
Sensor Excitation (Supply) Options	5 VDC, 10 V DC (Independently Adjustable via Switch For Each Channel)

POWER

Power Input	220 V AC - 50 Hz
Power Consumption	10W Max.
Gateway	9V DC 500 mA Adapter

INPUT / OUTPUT INTERFACES

Channel Inputs	DSUB9 Female
Power Input and Chain	C14 Connector (IEC Power Cable, Computer Type)
Inter Connection (RS485)	2 x DSUB9 Male
Gateway Communication	USB B Type (Printer Cable)
Gateway Power	DC Jack
Display	7-Segment Address Display

PHYSICAL & ENVIRONMENTAL

Dimensions	288 x 103 x 160 mm
Operating Temperature	-20 C° ... + 60 C°
Storage Temperature	-30 C° ... + 80 C°
Enclosure	Aluminium, Laboratory Type

ACCESSORIES


TESTBOX Bridge	Gateway for Computer Connection (1 Gateway is Included Free of Charge To Be Used With Up To 8 Devices)
TESTBOX Q-Cable	120, 350 Ohm Quarter/Half Bridge Completion Cable
TESTBOX RTD Cable	For Connection PT100 sensors
Thermocouple	Connector Box for Multiple Thermocouple Inputs with Cold Junction Compensation Sensor

CERTIFICATION

CE	LVD (2014/35/EU) EMC (2014/30/EU)
Local	Home (Inland) Produce Certification
Calibration	TDG Calibration Lab. Factory Calibration

SOFTWARE

TDG Software	EASYTEST BASIC
---------------------	----------------

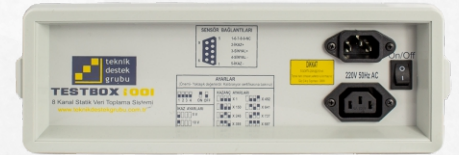

Teknik Destek Grubu Bilimsel Ölçme Ltd. Şti.

ODTÜ Teknokent Bilişim İnovasyon Merkezi
Mustafa Kemal Mah. Dumlupınar Bul. 280G B-Blok
D:214 Çankaya/Ankara/TURKEY
P : +90 312 473 97 91-92
info@tdg.com.tr
www.tdg.com.tr